

A green John Deere tractor is pulling a Salford SS400+ spinner spreader across a field of dark, tilled soil. The tractor is positioned in the center-right of the frame, moving towards the left. The spreader is a large, green, dual-bin machine with a wide, flat top. The background shows a line of trees under a cloudy sky. A large red and white diagonal graphic element separates the top image from the bottom text area.**SALFORD****THE SOLUTION FOR PRECISION**

SS400+

DELIVERING UNMATCHED PERFORMANCE WITH ULTIMATE VERSATILITY

Discover the ultimate solution for precision agriculture with the SS400+ spinner spreader. Engineered to set a new standard for crop production. With wider spread patterns and dual-bin capability, the SS400+ offers unparalleled flexibility to meet your unique application needs. Salford's advanced Sniper technology ensures precise section control up to 120 feet, maximizing the efficiency of your fertilizer application. The quick conversion feature for lime spreading and robust, low-maintenance design make the SS400+ units an indispensable tool for any application environment. Experience the future of spreading technology and elevate your operation with the SS400+ spinner spreader.

See our full line of products and find your local dealer at salfordgroup.com
USA | CANADA 1-866-442-1293



SS400+ BENEFITS

- More Acres Per Pass
- Reduced Soil Compaction
- Lower Fuel Use
- Optimal Application Timing
- Less Equipment Wear
- Efficient Labor Use
- Flexible Application Speed
- Continuous Operation
- Simple operation and setup
- Versatile Product Handling

SS400+

CONFIGURATION	SS300	SS420
	Lime	Fertilizer
SINGLE BIN CAPACITY	314 cu-ft.	427 cu-ft.
DUAL BIN CAPACITY	N/A	375 cu-ft.
RATES	Min: 500 lbs/ac. Max: 6000 lbs/ac. 10 mph 100 lb/cu-ft.	Min: 35 lbs/ac. Max: 685 lbs/ac. 15 mph 65 lb/cu-ft.
SECTION CONTROL**	N/A	12
SWATH WIDTH	Up to 70 ft.	Up to 120 ft.
RATE CONTROL	ISO Compatible	
LIGHTS	LED Red/Amber Transport; LED Work Lights	
Material	304 Stainless Steel bin screens	
CHASSIS COMPATIBILITY	John Deere® 800R Case IH® Titan RBR Vector	



*Estimated rates at 15 mph. ground speed using product bulk density of 65 lbs/cu-ft. Actual rates may vary. **Section control for fertilizer application only

SS400+ VS LEADING CHASSIS MOUNT SPINNER SPREADER

	SS400+	COMPETITORS
SWATH	Fertilizer 120 ft.	Fertilizer 90 ft.
	Lime 70 ft.	Lime 60 ft.
CAPACITY	Fertilizer 427 cu/ft.	Fertilizer 378 cu/ft.
	Lime 314 cu/ft.	Lime 298 cu/ft.

- ✓ 33% MORE Fertilizer swath
- ✓ 17% MORE Lime swath
- ✓ 11% MORE Fertilizer capacity
- ✓ 7% MORE Lime capacity

BIN CONFIGURATIONS

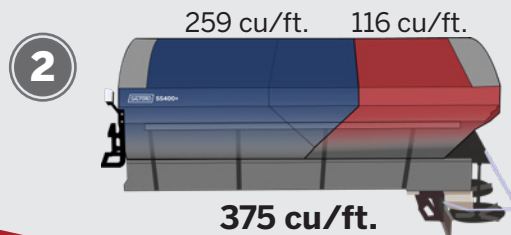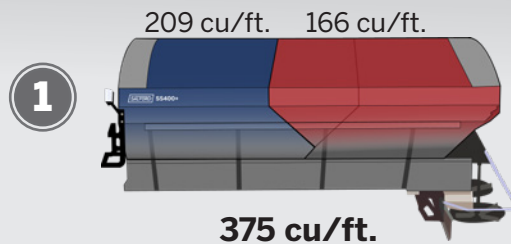

@SALFORDGROUP