

The image shows a green John Deere tractor pulling a Salford SS400+ spinner spreader in a field. The spreader is a large, green, dual-bin machine with a black hopper and a wide spreader frame. It is equipped with large, black, treaded tires with yellow rims. The tractor is positioned in the center of the frame, facing right. The background consists of a field of tall, green grass and some trees in the distance under a cloudy sky. A red diagonal line runs across the image, separating the top section from the bottom section.**SALFORD****THE SOLUTION FOR PRECISION**

SS400+

DELIVERING UNMATCHED PERFORMANCE WITH ULTIMATE VERSATILITY

Discover the ultimate solution for precision agriculture with the SS400+ spinner spreader. Engineered to set a new standard for crop production. With wider spread patterns and dual-bin capability, the SS400+ offers unparalleled flexibility to meet your unique application needs. Salford's advanced Sniper technology ensures precise section control up to 120 feet, maximizing the efficiency of your fertilizer application. The quick conversion feature for lime spreading and robust, low-maintenance design make the SS400+ units an indispensable tool for any application environment. Experience the future of spreading technology and elevate your operation with the SS400+ spinner spreader.

See our full line of products and find your local dealer at salfordgroup.com
USA | CANADA 1-866-442-1293



SS400+ BENEFITS

- More Acres Per Pass
- Reduced Soil Compaction
- Lower Fuel Use
- Optimal Application Timing
- Less Equipment Wear
- Efficient Labor Use
- Flexible Application Speed
- Continuous Operation
- Simple operation and setup
- Versatile Product Handling

SS400+

CONFIGURATION	Lime	Lime / Fertilizer
SINGLE BIN CAPACITY	314 cu-ft.	427 cu-ft.
DUAL BIN CAPACITY	N/A	375 cu-ft.
RATES	Min: 500 lbs/ac. Max: 6000 lbs/ac. 10 mph 100 lb/cu-ft.	Min: 35 lbs/ac. Max: 685 lbs/ac. 15 mph 65 lb/cu-ft.
SECTION CONTROL**	N/A	12
SWATH WIDTH	Up to 70 ft.	Up to 120 ft.
RATE CONTROL	ISO Compatible	
LIGHTS	LED Red/Amber Transport; LED Work Lights	
Material	304 Stainless Steel bin screens	
CHASSIS COMPATIBILITY	John Deere® 800R Case IH® Titan RBR Vector	



*Estimated rates at 15 mph. ground speed using product bulk density of 65 lbs/cu-ft. Actual rates may vary. **Section control for fertilizer application only

SS400+ VS LEADING CHASSIS MOUNT SPINNER SPREADER

	SS400+		COMPETITORS	
SWATH	Fertilizer	120 ft.	Fertilizer	90 ft.
	Lime	70 ft.	Lime	60 ft.
CAPACITY	Fertilizer	427 cu/ft.	Fertilizer	378 cu/ft.
	Lime	314 cu/ft.	Lime	298 cu/ft.

- ✓ 33% MORE Fertilizer swath
- ✓ 17% MORE Lime swath
- ✓ 11% MORE Fertilizer capacity
- ✓ 7% MORE Lime capacity

BIN CONFIGURATIONS

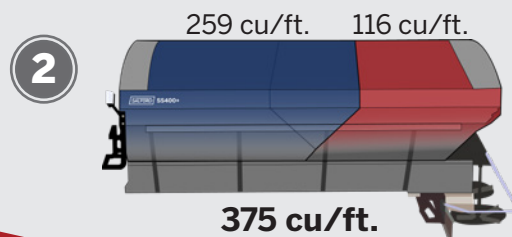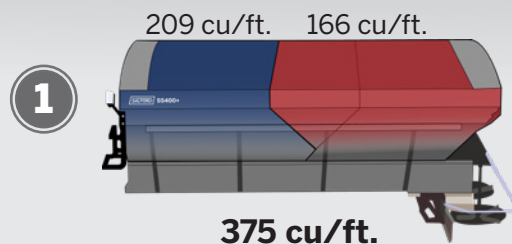

@SALFORDGROUP