



**SALFORD**

# MOUNTED AIRBOOM APPLICATORS



**90ft.**  
BOOM

## **AB300AF**

**MOUNTED AIR BOOM APPLICATOR FOR AGCO TG8400**  
**AIM FURTHER. APPLY ON-TARGET.**

Salford's AB300AF chassis mounted air boom applicator is engineered for the AGCO TG8400 floater chassis. With a 90 ft. application width and the versatile new hopper you can accurately meter one, two or three products at once allowing you to apply granular fertilizer, granular herbicide or combinations of products, in one pass.



**SALFORD**

See our full line of products and find your local dealer at [salfordgroup.com](http://salfordgroup.com)  
Osceola, Iowa • Cornelia, Georgia • Salford, Ontario • Elie, Manitoba • 1-866-442-1293



## SIMPLE & ACCURATE APPLICATION


Salford's latest AB300AF model features Valmar's Venturi metering design with proven reliability and simple maintenance. Reduce application overlap and save on input costs with variable rate application and left/right section control. Engineered specifically for the AGCO TG8400 series floater chassis, this AB300AF model will integrate seamlessly with your chassis.

### Valmar AB300AF Mounted Air Boom Applicator for AGCO TG8400

<b>Chassis Compatibility</b>	AGCO TG8400
<b>Hopper Option 1</b>	409 Stainless Steel (Painted to match chassis) 3 Compartments 2x Main Products + 1 Micronutrient/Cover Crop/Granular Herbicide
<b>Hopper Option 2 AB300AFM</b>	409 Stainless Steel (Painted to match chassis) 2 compartment 1x Main Product + 1 Micronutrient/Cover Crop/Granular Herbicide
<b>Application Rates</b>	Main Metering: 75 - 1200 lbs./Acre Micro Low Pegged: 6 - 75 lbs./Acre Micro Standard Pegged: 15-280 lbs./Acre *Rates are calculated using a density of 65 lbs/cu. ft. at 10 mph. Actual rates may vary due to conditions.
<b>Metering</b>	Factory installed and set up for Raven® RCM Left / Right section control Independent Variable Rate by Product Stainless Steel 304 Conveyors (Compartments 1 & 2) Meter Rollers to apply mico-nutrients cover crops or granular herbicides
<b>Boom</b>	90-foot spread, 304 stainless steel Hydraulic bi-fold booms with spring protected break-away tips Hydraulic boom suspension with boom tip height adjustment and optional Raven XRT®

## REVOLUTIONARY NEW HOPPER DESIGN

This NEW AB300AF model is capable of applying one, two or three products at once with various hopper configurations. Empty hoppers can be adjusted in seconds, no tools or bin inserts required.

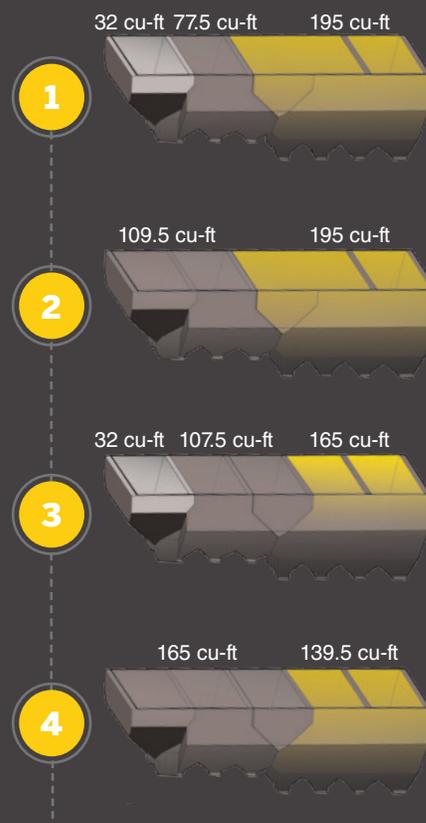

Products and specifications subject to change without notice and without liability therefore. Images may include optional equipment. AGCO is a registered trademark of AGCO Corporation. Salford® is a registered trademark of Salford Group Inc. Copyright© 2021 Salford Group Inc. 2021.08